

Dual Hydraulic Hose Reels

MPD, TDMP & 1275HP Series

MPD, TDMP and 1275HP Series "Dual Hydraulic" hose reels have similar features to their related series, but have been redesigned to handle dual hydraulic applications. Choose between spring driven retraction, hand crank or motorized models.

MPD & TDMP SERIES Offers... 1275HP SERIES Offers...

- ✓ Dual Port Full Flow Swivel
- ✓ One-Sided Supply/Return Hookup
- ✓ Swivel Seals: TEFLON®
- ✓ Designed For Dual Hydraulic Emergency Rescue Systems And Other High Pressure Hydraulic Tools
- ✓ Two High Pressure Full Flow Melanized Steel 1/4" Swivel Inlets
- ✓ Low Profile Outlet Riser & Open Drum Slot Design
- ✓ Swivel Seals: VITON®



MOTOR

MANUAL

SPRING

Drive Type

- Spring
- Manual
- Motor

Media

- Oil

Swivel material

- Steel

Seal material

- Teflon/Viton

MPD SERIES // Spring Rewind

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
N/A	MPDL-N-150-BGX	6mm	12mm	15 m	210	1/4"	1/4"	-	28	1
MPD-N-330-BGX	MPDL-N-330-BGX	10mm	17mm	9 m	210	3/8"	3/8"	35	28	1
MPD-N-430-BGX	MPDL-N-430-BGX	12mm	21mm	9 m	175	1/2"	1/2"	36	28	1

Reels are furnished standard with dual-hydraulic hose banded together every 1m with power strip-type clamps. Maximum temperatures

TDMP SERIES // Spring Rewind


MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
TDMP-N-350-BGX	TDMP-L-N-350-BGX	10mm	17mm	15 m	210	3/8"	3/8"	47	36	2
TDMP-N-450-BGX	TDMP-L-N-450-BGX	12mm	19mm	15 m	175	1/2"	1/2"	48	36	2

Reels are furnished standard with dual-hydraulic hose banded together every 1m with power strip-type clamps. Maximum temperatures 99° C


1275HP SERIES // Manual & Motor Rewind

MODEL no hose	Rewind Type	Capacity with 6mm hose	Capacity with 10mm hose	BAR	Inlet	KG no hose	Size
1275HPL-(X*)-8	Rim Rewind	41 m	26 m	700	1/4"	17	3
1275HPL-(X*)-8-C	Geared Bevel Crank	41 m	26 m	700	1/4"	20	4
1275HPL-(X*)-8-A	Air Motor	41 m	26 m	700	1/4"	23	5
1275HPL-(X*)-8-E	Electric Motor	41 m	26 m	700	1/4"	31	6
1275HPL-(X*)-12	Rim Rewind	61 m	38 m	700	1/4"	18	7
1275HPL-(X*)-12-C	Geared Bevel Crank	61 m	38 m	700	1/4"	20	8
1275HPL-(X*)-12-A	Air Motor	61 m	38 m	700	1/4"	24	9
1275HPL-(X*)-12-E	Electric Motor	61 m	38 m	700	1/4"	32	10


MPD SERIES



TDMP SERIES



1275HP SERIES

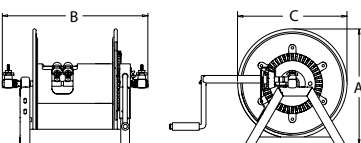

DIMENSIONS

SIZE	A	B	C	D	E	L	M
1	298	533	498	152	152	102	127
2	273	648	584	203	229	178	203
3	460	467	432	-	-	-	-
4	460	467	432	-	-	-	-
5	460	521	432	-	-	-	-
6	460	568	432	-	-	-	-
7	460	578	432	-	-	-	-
8	460	578	432	-	-	-	-
9	460	622	432	-	-	-	-
10	460	670	432	-	-	-	-

1275HP OUTLET OPTIONS

Replace (X*) in model number with one of the following;

- A = 4 JIC Male
- B = 5 JIC Male with 1.5" x 3/8" adapter
- C = 1/4" BSP Female
- D = M14 x 1.5 Female
- 4 = 1/2" NPT Female (standard - no adapter)



FOR MORE INFORMATION PLEASE CALL ☐

+44 (0) 1536 464 990 or visit www.crireels.com