


## T, SP & SD Series

**SH, T SP Series "Fuel" spring driven hose reels have been selected specifically for fuel delivery.** The SH, T & SP Series are suitable for a wide variety of fuel applications. The solid construction allows the reels to be used for vehicle mount.

**Static discharge reels are the ideal accompaniment** and designed to be used in combustible environments where static build up could ignite a spark and subsequent explosion.

### T & SP SERIES Offers... SD SERIES Offers...

- ✓ Solid Steel Swivel
- ✓ Viton Seals Suitable For Diesel & Petrol
- ✓ High Visibility Orange Vinyl Cable Cover
- ✓ Includes Cable, Stop & 50 Amp Grounding Clamp (100 Amp Copper Grounding Clamp Available)
- ✓ Non-Sparking Locking Ratchet Secures Cable At Desired Length


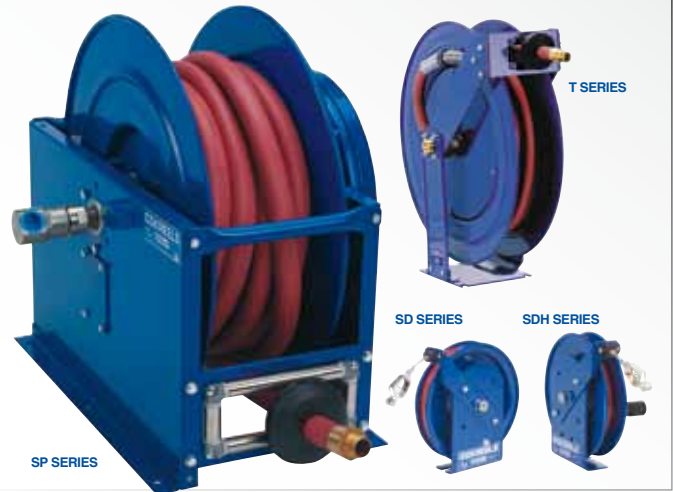


Drive Type	<b>Spring</b>
	<b>Manual</b>
Media	<b>Fuel</b>
	<b>Cable</b>
Swivel material	<b>Steel</b>
Seal material	<b>Viton</b>



### DIMENSIONS

SIZE	A	B	C	D	E	F	G
1	248	648	584	203	229	178	203
2	164	648	610	203	229	178	203
3	254	648	584	203	229	178	203
4	267	190	610	390	533	660	622
5	267	190	711	390	533	762	728
6	267	190	711	390	457	762	728
7	102	305	279	-	-	-	-
8	102	1127	368	-	-	-	-
9	279	292	146	127	30	-	-



### T Series // Fuel

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
TSHF-N-550-BGX	TSHL-N-550-BGX	19mm	29mm	15 m	21	3/4"	3/4"	41	32	1
TSHF-N-575-BGX	TSHL-N-575-BGX	19mm	29mm	23 m	21	3/4"	3/4"	48	33	2
TSHF-N-635-BGX	TSHL-N-635-BGX	25mm	37mm	10 m	21	1"	1"	43	34	3

Not suitable for Euro 95/98 type fuel

### SP Series // Fuel

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
-	SLPL-650-BGX	25mm	37mm	15 m	21	1"	1"	-	49	4
SLPF-650-BGX	-	25mm	37mm	15 m	21	1"	1"	64	-	4
-	SLPL-675-BGX	25mm	37mm	23 m	21	1"	1"	-	67	5
-	SLPL-750-BGX	32mm	46mm	15 m	18	1.25"	1.25"	-	50	6

Not suitable for Euro 95/98 type fuel

### STATIC DISCHARGE REELS

**SD & SDH Series "Static Discharge"** reels are designed to be used in combustible environments where the static buildup could ignite a spark and subsequent explosion.

#### SD Series // Spring rewind

MODEL cable	cable	O.D.	Length	KG	MODEL no cable	KG	Size
SD-35	Galvinised	4mm	10 m	8	-	-	7
SD-50	Galvinised	4mm	15 m	9	SDL-50	8	7
SD-75	Galvinised	4mm	23 m	14	-	-	8
SD-100	Galvinised	4mm	31 m	15	SDL-100	13	8
SD-35-1	Stainless Steel	4mm	10 m	8	-	-	7
SD-50-1	Stainless Steel	4mm	15 m	9	-	-	7
SD-75-1	Stainless Steel	4mm	23 m	14	-	-	8
SD-100-1	Stainless Steel	4mm	31 m	15	-	-	8

#### SDH Series // Manual rewind

MODEL cable	cable	O.D.	Length	KG	MODEL no cable	KG	Size
SDH-100	Galvinised	4mm	30 m	6	-	-	9
SDH-200	Galvinised	4mm	60 m	7	SDHL-200	5	9
SDH-100-1	Stainless Steel	4mm	30 m	6	-	-	9
SDH-200-1	Stainless Steel	4mm	60 m	6	-	-	9

