


Light Weight Hose Reels

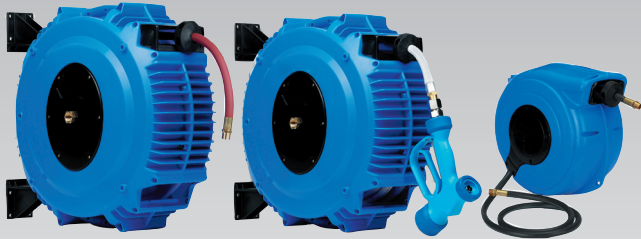

RG Series UPVC Enclosed Hose Reels

RG Series is a durable yet economical reel, lightweight and easy to operate. The RG Series has been designed to meet the harsh demands of industrial environments and is manufactured from corrosion proof, composite materials for continuous, trouble-free operation.

LOW PRESSURE // Air & Water

MODEL	ID mm	Length	BAR	PSI	Inlet	Outlet	Weight	W	L	H
AW815-001	8mm	15m	17	240	3/8"	3/8"	11Kg	239	559	490
AW820-001	8mm	20m	17	240	3/8"	3/8"	12Kg	239	559	490
AW1015-001	10mm	15m	17	240	3/8"	3/8"	12Kg	239	559	490
AW1020-001	10mm	20m	17	240	3/8"	3/8"	12Kg	239	559	490
AW1215-001	12mm	15m	17	240	1/2"	1/2"	12Kg	239	559	490
AW1218-001	12mm	18m	17	240	1/2"	1/2"	12Kg	239	559	490



RG SERIES Offers...

- ✓ High Quality Finished Edge Spring
- ✓ Full Flow Heavy Duty Swivel
- ✓ Multi Position Locking Mechanism
- ✓ Composite Material

RG Series Wash Down UPVC Enclosed Hose Reels

RG Series hotwash reels are specifically designed as the perfect solution for hot water washdown applications in food preparation areas. The food grade hose is acceptable for food processing areas for hot or cold water washdown. The stain and chemical resistant engineered composite construction allow the reel to be easily washed and hygienically cleaned as and when required.

LOW PRESSURE // Air & Water

MODEL	ID mm	Length	BAR	PSI	Inlet	Outlet	Weight	W	L	H
HW1015-001	10mm	15m	17	240	3/8"	3/8"	10kg	239	559	490
HW1020-001	10mm	20m	17	240	3/8"	3/8"	12kg	239	559	490
HW1215-001	12mm	15m	17	240	1/2"	1/2"	12kg	239	559	490



RG SERIES Offers...

- ✓ High Quality Finished Edge Spring
- ✓ Full Flow Heavy Duty Swivel
- ✓ Multi Position Locking Mechanism
- ✓ Composite Material

GP Series Compact UPVC Enclosed Hose Reels

The GP Series is the ideal solution for small to medium workshop applications, where the size of the reel is important or short hose lengths are all that is required. The GP Series is manufactured from tough corrosion proof composite materials and extensive tests have shown it to be highly resistant to the vast majority of acids and alkalis. Typical uses for the GP Series are: service vans, under bench applications, assembly lines, etc. Each GP Series is supplied complete with a 1.5m connection hose.

LOW PRESSURE // Air & Water

MODEL	ID mm	Length	BAR	PSI	Inlet	Outlet	Weight	W	L	H
GP612	6	12 m	17	240	1/4"	1/4"	7.5Kg	185	431	342
GP812	8	12 m	17	240	3/8"	3/8"	7.5Kg	185	431	342
GP1010	10	10 m	17	240	3/8"	3/8"	7.5Kg	185	431	342



GP SERIES Offers...

- ✓ High Quality Finished Edge Spring
- ✓ Full Flow Heavy Duty Swivel
- ✓ Multi Position Locking Mechanism
- ✓ Composite Material



Hose & Cable Reel Specialists

+44 (0) 1536 464 990 SALES@CRIEELS.COM WWW.CRIEELS.COM