


T, SP & SD Series

SH, T SP Series "Fuel" spring driven hose reels have been selected specifically for fuel delivery. The SH, T & SP Series are suitable for a wide variety of fuel applications. The solid construction allows the reels to be used for vehicle mount.

Static discharge reels are the ideal accompaniment and designed to be used in combustible environments where static build up could ignite a spark and subsequent explosion.

T & SP SERIES Offers... SD SERIES Offers...

- ✓ Solid Steel Swivel
- ✓ Viton Seals Suitable For Diesel & Petrol
- ✓ High Visibility Orange Vinyl Cable Cover
- ✓ Includes Cable, Stop & 50 Amp Grounding Clamp (100 Amp Copper Grounding Clamp Available)
- ✓ Non-Sparking Locking Ratchet Secures Cable At Desired Length

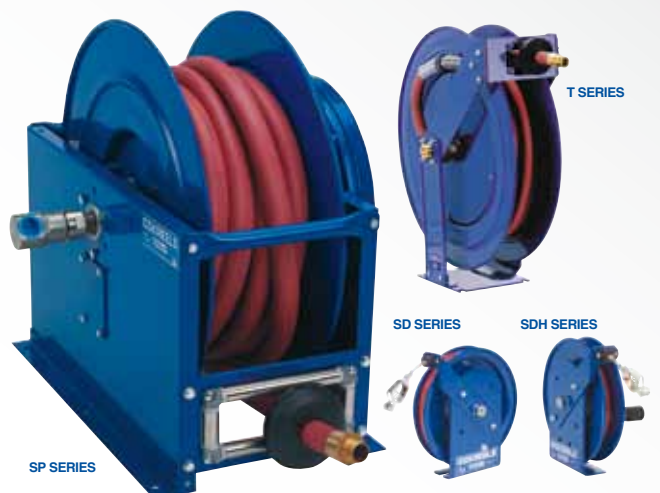

Drive Type

Spring

Manual

Media

Fuel

Cable

Swivel material

Steel



Seal material

Viton



DIMENSIONS

SIZE	A	B	C	D	E	F	G
1	248	648	584	203	229	178	203
2	164	648	610	203	229	178	203
3	254	648	584	203	229	178	203
4	267	190	610	390	533	660	622
5	267	190	711	390	533	762	728
6	267	190	711	390	457	762	728
7	102	305	279	-	-	-	-
8	102	1127	368	-	-	-	-
9	279	292	146	127	30	-	-



T Series // Fuel

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
TSHF-N-550-BGX	TSHL-N-550-BGX	19mm	29mm	15 m	21	3/4"	3/4"	41	32	1
TSHF-N-575-BGX	TSHL-N-575-BGX	19mm	29mm	23 m	21	3/4"	3/4"	48	33	2
TSHF-N-635-BGX	TSHL-N-635-BGX	25mm	37mm	10 m	21	1"	1"	43	34	3

Not suitable for Euro 95/98 type fuel

SP Series // Fuel

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
-	SLPL-650-BGX	25mm	37mm	15 m	21	1"	1"	-	49	4
SLPF-650-BGX	-	25mm	37mm	15 m	21	1"	1"	64	-	4
-	SLPL-675-BGX	25mm	37mm	23 m	21	1"	1"	-	67	5
-	SLPL-750-BGX	32mm	46mm	15 m	18	1.25"	1.25"	-	50	6

Not suitable for Euro 95/98 type fuel

STATIC DISCHARGE REELS

SD & SDH Series "Static Discharge" reels are designed to be used in combustible environments where the static buildup could ignite a spark and subsequent explosion.


SD Series // Spring rewind

MODEL cable	cable	O.D.	Length	KG	MODEL no cable	KG	Size
SD-35	Galvinised	4mm	10 m	8	-	-	7
SD-50	Galvinised	4mm	15 m	9	SDL-50	8	7
SD-75	Galvinised	4mm	23 m	14	-	-	8
SD-100	Galvinised	4mm	31 m	15	SDL-100	13	8
SD-35-1	Stainless Steel	4mm	10 m	8	-	-	7
SD-50-1	Stainless Steel	4mm	15 m	9	-	-	7
SD-75-1	Stainless Steel	4mm	23 m	14	-	-	8
SD-100-1	Stainless Steel	4mm	31 m	15	-	-	8

SDH Series // Manual rewind

MODEL cable	cable	O.D.	Length	KG	MODEL no cable	KG	Size
SDH-100	Galvinised	4mm	30 m	6	-	-	9
SDH-200	Galvinised	4mm	60 m	7	SDHL-200	5	9
SDH-100-1	Stainless Steel	4mm	30 m	6	-	-	9
SDH-200-1	Stainless Steel	4mm	60 m	6	-	-	9

SD SERIES



SDH SERIES

