

# Stainless Steel Hose Reels

## SS Series

**1125 & 1175 Series stainless steel hand crank and motorized hose reels have the features demanded by industry professionals.** The industry preferred design features a sturdy one piece all welded "A" frame base, low profile outlet riser and open drum slot design provides a non-crimping, flat smooth hose wrap.

### 1125 & 1175 SERIES Offers...

- ✓ Stainless Steel Frame, drum and flanges
- ✓ Solid Stainless Steel Swivel
- ✓ Viton Seals Suitable For Diesel & Petrol



MOTOR

MANUAL

SPRING


Drive Type	<b>Manual</b>
	<b>Motor</b>
Media	<b>Air</b>
	<b>Water</b>
	<b>Oil</b>
Swivel material	<b>S/Steel</b>
Seal material	<b>Viton</b>

### 1125 HAND CRANK MODELS // Air & Water & Oil

MODEL no hose	I.D.	O.D.	Length	I.D.*	O.D.*	Length*	BAR	Inlet F NPT 90°	Outlet F NPT	KG	Size
1125-4-100-SS	12mm	21 mm	30 m	10mm	19	42 m	300	1/2"	1/2"	16	1
1125-4-200-SS	12mm	21 mm	60 m	10mm	19	91 m	300	1/2"	1/2"	18	2
1125-4-325-SS	12mm	21 mm	99 m	10mm	19	136 m	300	1/2"	1/2"	22	3
1125-4-450-SS	12mm	21 mm	136 m	10mm	19	189 m	300	1/2"	1/2"	24	4
1125-4-500-SS	12mm	21 mm	152 m	10mm	19	212 m	300	1/2"	1/2"	26	5
1125-5-50-SS	19mm	29 mm	15 m	12mm	22	30 m	300	3/4"	3/4"	17	6
1125-5-100-SS	19mm	29 mm	30 m	12mm	22	61 m	300	3/4"	3/4"	19	7
1125-5-175-SS	19mm	29 mm	53 m	12mm	22	98 m	300	3/4"	3/4"	23	8
1125-5-200-SS	19mm	29 mm	61 m	12mm	22	136 m	300	3/4"	3/4"	25	9
1125-5-250-SS	19mm	29 mm	76 m	12mm	22	152 m	300	3/4"	3/4"	27	10
1125-6-35-SS	25mm	37 mm	10 m	19mm	32	15 m	300	1"	1"	23	11
1125-6-50-SS	25mm	37 mm	15 m	19mm	32	23 m	300	1"	1"	25	12
1125-6-75-SS	25mm	37 mm	23 m	19mm	32	36 m	300	1"	1"	28	13
1125-6-100-SS	25mm	37 mm	30 m	19mm	32	45 m	300	1"	1"	31	14

\* Adapter required  
For dimensions & drawings please see page 26

1125 SERIES




### 1175 HAND CRANK MODELS // Air & Water & Oil

MODEL no hose	I.D.	O.D.	Length	I.D.*	O.D.*	Length*	BAR	Inlet F NPT 90°	Outlet F NPT	KG	Size
1175-6-50-SS	25mm	37mm	15 m	19mm	29mm	30 m	300	1"	1"	30	1
1175-6-100-SS	25mm	37mm	30 m	19mm	29mm	45 m	300	1"	1"	32	2
1175-6-125-SS	25mm	37mm	38 m	19mm	29mm	61 m	300	1"	1"	33	3
1175-6-135-SS	25mm	37mm	41 m	19mm	29mm	53 m	300	1"	1"	32	6
1175-6-150-SS	25mm	37mm	45 m	19mm	29mm	76 m	300	1"	1"	34	4
1175-6-200-SS	25mm	37mm	60 m	19mm	29mm	91 m	300	1"	1"	38	5

\* Adapter required  
For dimensions & drawings please see page 27

1185 SERIES

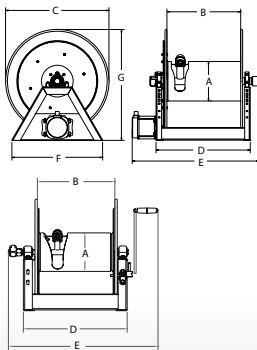

For dimensions & drawings please see page 26

### MOTORS DRIVEN MODELS // Add the suffix to hand crank models above

Suffix #	Motor Type	Description	Extra KG
A	AIR #4 GAST	Comp. Air Motor	4
E	ELECTRIC - 12V DC	1/3 HP	6
EB	ELECTRIC - 24V DC	1/2 HP	12
ED	ELECTRIC Explosion Proof	1/2 HP	12
EA	ELECTRIC Explosion Proof - 115V DC	1/2 HP	12
H	HYDRAULIC	End Ported 9/16-18 UNF	3
C	CRANK	Bevel Gear	2

